

SSQ Series

Skid Steer Mulcher




osma
Since 1976



SSQ 160 & 180 21 - 42 gpm



Cobra Planer Tooth

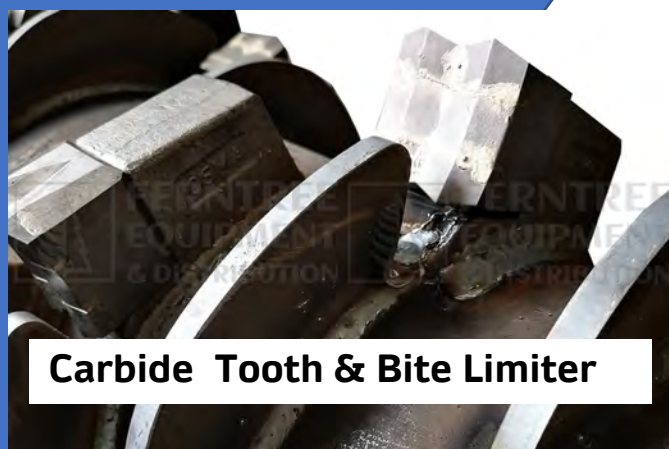


Carbide Tooth & Bite Limiter

Performance/Counter knife



Bosch/Rexroth (Option)



Fixed Piston Standard



3F OSMA Valve

Technical data are dependent on equipment and may vary.
The images may contain additional options which do not belong to the standard scope of delivery. **OSMA** and **FERNTREE Equipment** reserves the right to make amendments and updates at any time without prior notice.

1.By-pass 2.Anti shock 3. Automatic Oil flow regulation

Technical Specification SSQ

Model	Weight lbs	Flow Gpm	Pressure PSI	Working width	Tools	Motor CC	Drive line
SSQ 160	2250	21 - 42 Dep. Motor	3080 - 3780 Anti Cavitation Valve	63 (74)	33	Fix. Piston 47,55,64, 80 (VM80)	4V Belts
SSQ 180	2450	21 - 40 Dep. Motor	3080 - 3780 Anti Cavitation Valve	72 (82)	39	Fix. Piston 47,55,64, 80 (VM80)	4 V Belts

Standard Equipment

- Hydraulic hoses
- Carbide tooth
- Belt transmission 64cc 5 Belts
- Rear Chain Guard
- Hardox / DOMEX Steel frame
- Double Counter Knife
- Hydr. Flow & Pressure Gauge

Optional Equipment

- Bosch Rexroth VM 80 Motor
- Bite Limiter (DCR)
- Carbide from Factory
- Black Main Frame (Sp.order)
- Electr. Hydr. Door
- Motor Choice (47cc,55cc,80cc) for Low flow to High Flow



**FERNTREE
EQUIPMENT
& DISTRIBUTION**

YOUR QUALITY BRAND CONNECTION

**Import & Distribution
North-America**

Info@ferntree.ca

+1 778 222 9111

Guelph Ontario

Canada www.ferntree.ca

osma
Since 1976