

TFM - Series

15t – 22t Excavator




The **TFM Series** is designed for mulching up to 12 inches. Fixed tool holder allows the user to install carbide teeth or chipping tools onto the same mount, which are 180 degree reversible. Equipped with 64cc fixed piston motor or optional with Bosch Rexroth Variable displacement motor. Comes standard with a hydraulic door and DOUBLE COUNTER Knives.



TFM 100 & 130



Cobra Planer Tooth

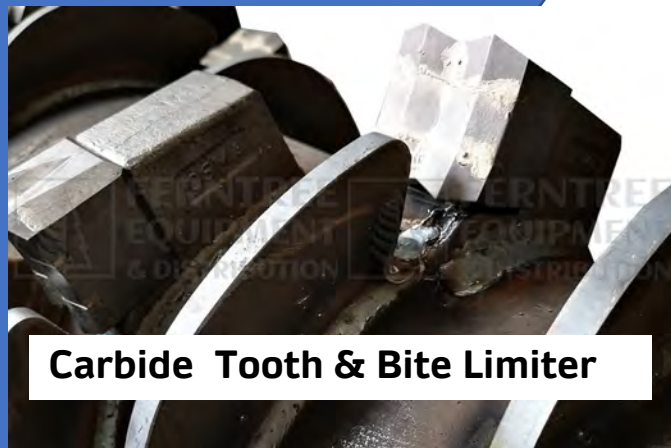

Carbide Tooth & Bite Limiter

Performance/Counter knife

Maintenance

Fixed Piston or Variable



3F- OSMA VALVE

1.By-pass 2.Anti shock 3. Automatic Oil flow regulation

Technical Specification TFM 100 & 130 FIXED TOOL

Model	Weight lbs	Flow Gpm	Pressure PSI	Working width	Tools	Motor CC	Drive line
TFM 100	1962	31 - 41	3780 - 4200 Anti Cavitation Valve	41 Outer 49	22	64cc fixed Piston Motor	5 XPB Belt
TFM 130	2190	31 - 41	3780 - 4200 Anti Cavitation Valve	51 Outer 59	26	64cc fixed Piston Motor	5 XPB Belt

Standard Equipment

- Planer Teeth
- Belt transmission
- Rear Chain Guard
- Hydraulic Door with Counter knife
- Flat pack/ base plate
- Hardox / DOMEX Steel frame
- Double Counter knife
- Generic Bearing & Belt sizes

Optional Equipment

- Bosch Rexroth VM 80cc Motor
- 64cc Fixed Piston
- 55cc TFL 100
- DCR - Bite Limiter Rotor
- Carbide from Factory
- Black Main Frame & Covers
- Excav. Mounting Bracket
- MADE In Canada

Technical data are dependent on equipment and may vary.
The images may contain additional options which do not belong to the standard scope of delivery. **OSMA** and **FERNTREE Equipment** reserves the right to make amendments and updates at any time without prior notice.



**FERNTREE
EQUIPMENT
& DISTRIBUTION**

YOUR QUALITY BRAND CONNECTION

**Import & Distribution
North-America**

Info@ferntree.ca
+1 778 222 9111
Guelph Ontario
Canada www.ferntree.ca

