


# FF-L Series Mulcher

Mini Excavator Forestry Mulcher  
2t – 5t Carrier



**FERNTREE  
EQUIPMENT  
& DISTRIBUTION**



The **FF-L** forestry mulcher, engineered for **2-5 ton** excavators, excels in shredding material up to 5" diameter. Its **advanced Bite Limiter technology** is optimized for high-efficiency vegetation management, offering exceptional reliability, efficient shredding, and ease of maintenance. The **FF-L** features a **Direct Drive motor**, which not only reduces maintenance but also enables a remarkably compact machine design. Additionally, the **FF-L** can be fitted with Planer blades and Carbide teeth, further enhancing its versatility and performance.

**FFL Series**  
Developed and Build in Italy for  
the North American Market



# FF - L Mini Excavator Series Mulcher

## FF -L 55 & 75


### 7 - 24 Gpm

#### STANDARD EQUIPMENT

- Casappa Gr 3 Gear Motor
- Flow management valve
- NO Case drain required
- Bite limiter technology
- 2.5m hoses
- Double Planer teeth
- Replaceable Skids
- Base plate

#### Optional

- Fixed Piston motor
- Carbide teeth
- Stump Splitter teeth
- Single Planer teeth

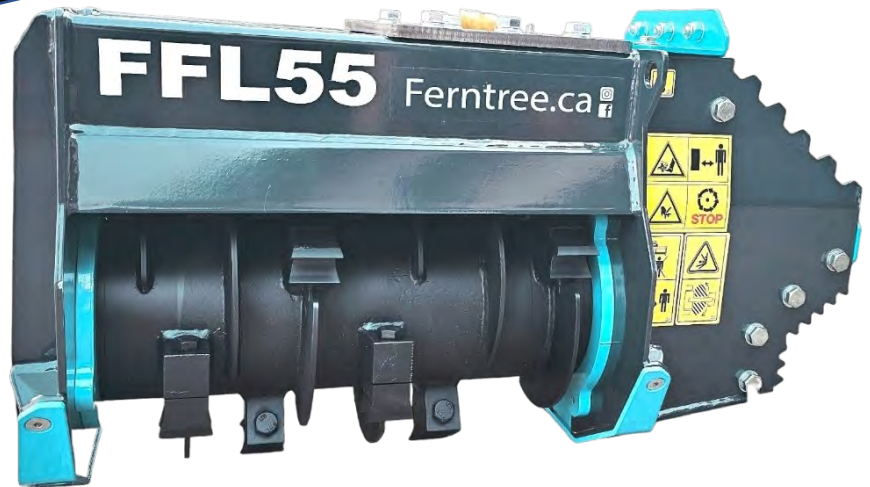

#### FLOW CONTROL VALVE , PAIRED WITH CASAPPA GEAR MOTOR OR FIXED PISTON MOTOR AND FLUID BOX



Flow Control Valve for a complete and safe engine management with relief valve, anti-cavitation system. E flow regulation for Rotor RPM

Double Planer



Planer carbide

Carbide

Rock Carbide



MODEL	FF-L55	FF-L 75
CUTTING WIDTH (inch/metric)	22/56	30/76
WEIGHT (Lbs./Kg)	376/170	443/200
OIL PRESSURE (bar) 1Bar = 14.5psi	220-250	220-250
OIL FLOW (l/min) 1Gpm = 3.78L	30 - 90	40 - 90
NUMBER OF TOOLS	12	16
MAX CUTTING DIAMETER (inch/metric)	5/12	5/12
DIMENSION A (mm)	22/56	30/76
DIMENSION B (mm)	36/930	44/1130

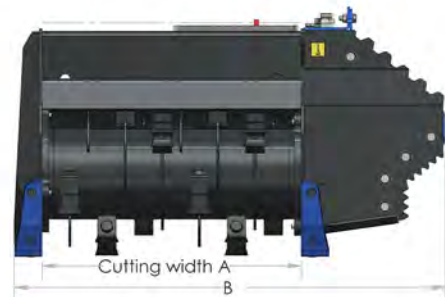

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice