

**F4S-160 / 190 / 225**  
**Skid Steer Mulcher**  
**28 - 54 Gpm**



**FERNTREE  
EQUIPMENT  
& DISTRIBUTION**

YOUR QUALITY BRAND CONNECTION



FERNTREE  
EQUIPMENT





# F4S Series / Skid Steer Mulcher

65 - 180 hp

21 - 58Gpm

3 Position HD Push Bar on oversized hinge points.



Vented covers



Bite Limiter Rotor  
Bolt in Hardox Liners




- Poly Belt
- Repl. Skids



120cc Bondioli & Pavesi  
Variable 2 Speed Motor

Max Torque  
Reduced spool up time

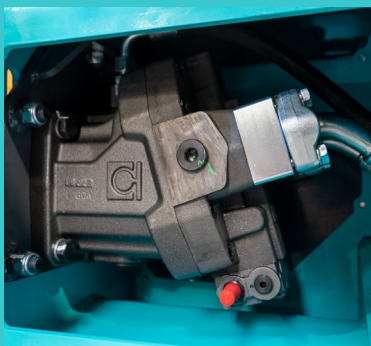

Double Chain Rear Curtain



**FERNTREE  
EQUIPMENT  
& DISTRIBUTION**

YOUR QUALITY BRAND CONNECTION

**Import & Distribution  
North-America**

[Info@ferntree.ca](mailto:Info@ferntree.ca)

+1 778 222 9111

Guelph Ontario

Canada [www.ferntree.ca](http://www.ferntree.ca)



# Remet CNC Technology Poland




Wear Liners from hardox  
Easy replacement by Bolt in solution.

Liners are split into 2 sections , to avoid jamming up when re install or removal.



Bite Limiter technology  
Choice of 4 different teeth.

Planer tooth  
Double Planer  
Single carbide  
Double Carbide

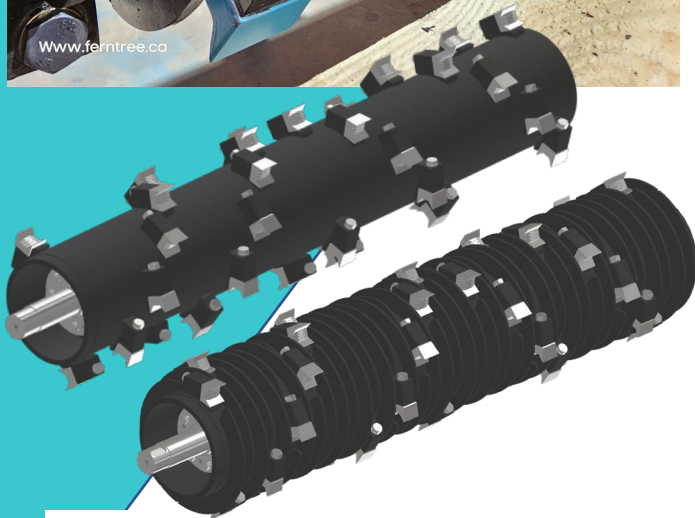

Rotor Choice  
Bite Limiter Technology  
Without Bite limiter  
Same tool holder.  
Bolted Stub shafts



**FERNTREE  
EQUIPMENT  
& DISTRIBUTION**  
YOUR QUALITY BRAND CONNECTION

**Import & Distribution  
North-America**

Info@ferntree.ca  
+1 778 222 9111  
Guelph Ontario  
Canada www.ferntree.ca



# F4S.160 - F4S.190 - F4S.225

## Technical Specifications

Model	F4S-225	F4S-190	F4S-160
Overall width:	2570mm	2320mm	1860mm
Length:	1190mm	1190mm	1190mm
Height:	1370mm	1370mm	1370mm
Minimum power:	80 hp	70 hp	65 hp
Maximum power:	180 hp	180 hp	180 hp
Shredding diameter	Up to 250mm	Up to 250mm	Up to 250mm
Recommended oil flow: LPM	100-220 l/min 26 – 58 gpm	80-220 l/min 21 – 58 gpm	80-220 l/min 21 – 58 gpm
Recommended oil flow: Gpm			
Recommended oil pressure:	200-350 bars	200-350 bars	200-350 bars
Rotor working width:	2250mm	1900mm	1600mm
rotor weight:	660 kg	560 kg	480 kg
Rotor Diameter:	440mm	440mm	440mm
Number of grinding teeth:	48 pcs.	40 pcs.	32 pcs.
tooth type:	Carbide or Planer Tooth option Single or double sided	Carbide or Planer Tooth option Single or double sided	Carbide or Planer Tooth option Single or double sided
Tooth holder type:	One Bolt M18x70 x1.5	One Bolt M18x70 x1.5	One Bolt M18x70 x1.5
Total weight:	1450 kg 3207 lbs	1280 kg 2831 lbs	1180 kg 2610 lbs

### Standard Equipment

- Hydraulic hoses & Coupler
- Planer teeth from Factory
- Bite limiter Rotor
- Poly chain Drive belt
- Double row Rear Chain Guard
- Hardox / DOMEX Steel frame
- Push frame with adjustment to 3 positions
- Replicable Skids
- Easy access lubrication points
- High torque 120cc two speed / variable Displacement motor



**FERNTREE  
EQUIPMENT  
& DISTRIBUTION**

YOUR QUALITY BRAND CONNECTION

**Import & Distribution  
North-America**

[Info@ferntree.ca](mailto:Info@ferntree.ca)

+1 778 222 9111

Guelph Ontario

Canada [www.ferntree.ca](http://www.ferntree.ca)

