Ferntree CONE Splitter

Excavator or Skid Steer Mounted

FERNTREE EQUIPMENT & DISTRIBUTION


YOUR QUALITY BRAND CONNECTION



FERNTREE SPLITTER SERIES



- HEX HEAD DRIVE SHAFT
- REPLACABLE CONE TIP
- TORQUE CONVERTER GEAR BOX
- QUICK REMOVABLE CONE
- SKID STEER MOUNT OPTIONAL

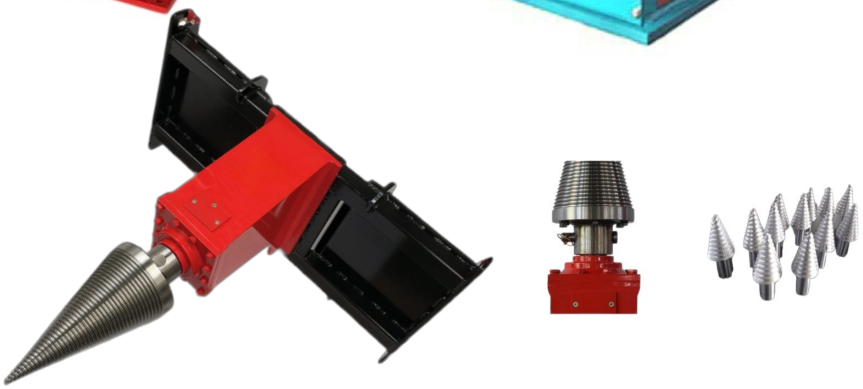

Log Splitter Parameter

Model	YDH12	YDH18	YDH40	YDH60	YDH80	YDH120	YDH150	YDH200	YDH250
Applicable(T)	2-4	3-5	3-6	5-8	6-12	10-15	12-17	16-25	17-30
Max Torque(Nm)	1180	1878	3760	5960	8240	12300	15200	19000	25020
Working Pressure(Bar)	100-170	100-170	100-170	100-190	120-205	120-205	120-205	150-230	150-230
Rated Oil Flow(Lpm)	30-70	50-95	40-75	40-90	60-100	80-150	80-150	100-150	100-150
Speed Range(r/min)	30-102	32-97	35-98	30-90	32-90	28-80	32-77	28-57	30-85
Cone Size(mm)	Φ200X370	Φ200X370	Φ200X400	Φ300X540	Φ300X540	Φ350X625	Φ350X625	Φ400X705	Φ400X705
Max Log Diameter(m)	0.4	0.5	0.8	1	1	1.5	1.5	2	2
Unit Size (mm)	230X260X845	230X260X845	400X270X930	500X420X135	500X420X145	620X450X145	620X450X145	800X500X165	800X500X165
Unit Weight(kg)	94	96	140	290	360	410	420	595	620

FERNTREE EQUIPMENT Import & Distribution for North-America
Info@ferntree.ca +1 778 222 9111 Guelph Ontario Canada www.ferntree.ca